ET6037Y -

Function Diagram

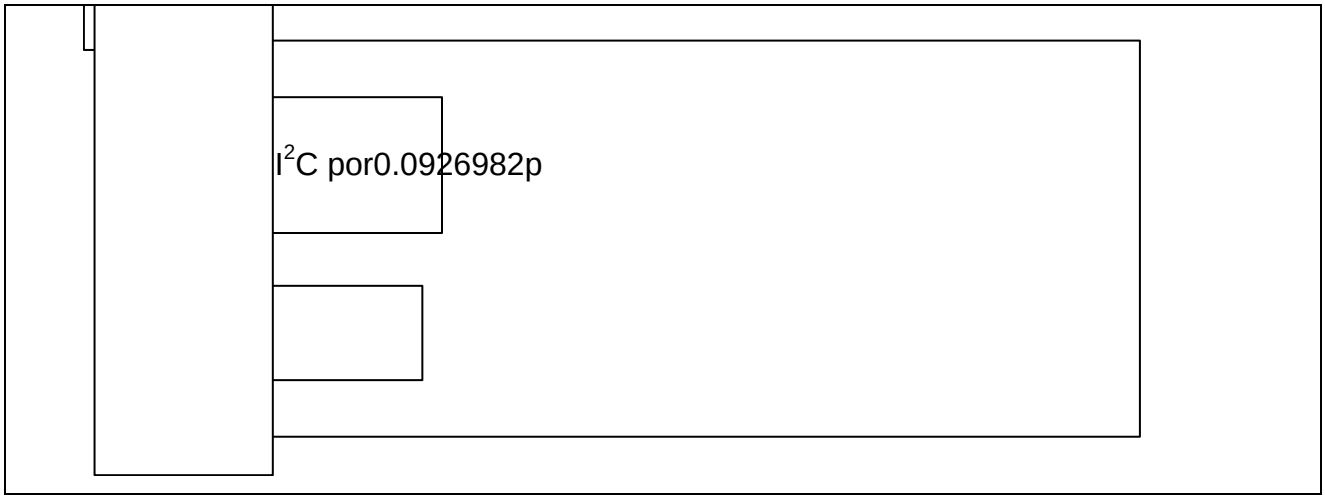

Functions Description

1.

ET

Notes

(1) Set each LEDs' fix brightness value(constant current) according to Table 3, and using the switch Signal of table 2, we can adjust the brightness of the RGB, n:0→5, RGB LED conf oo t e

ET

ET

ET

I2C Mode Timing

Symbol	Parameter	Min

Package Dimension

QFN24

Unit: mm

Symbol